Step 1: Cut an OD=85/100mm hole on the table.

Step 2: Place the outlet into the hole.

Step 3: Adjust the position of the outlet.

Step 4: Screw on.

Cautions

- When using this product, the max power must be less than 110-250V 15A.
- This product can only be used indoor and in dry environment. Please don't use outdoor or in humid environments, and keep it away from heat sources to avoid product leakage and other dangerous situations.
- Please don’t disassemble, modify or repair this product by non-professionals.
- Please don’t bind the power cord during use. Otherwise, it may overheat.
- Please keep children away from this product due to electric.
- When this product is powered on, please do not use conductors or other tools to test the opening force of the safety door.

Warranty


We provide one year warranty.
Use this product according to this user manual, and there is no man-made damage, the product will be guaranteed for one year.

Four-sided Pneumatic Pop Up Socket

User Manual

(OD=85MM/100MM)

Please read the instructions before starting the installation, and save the manual for future reference.

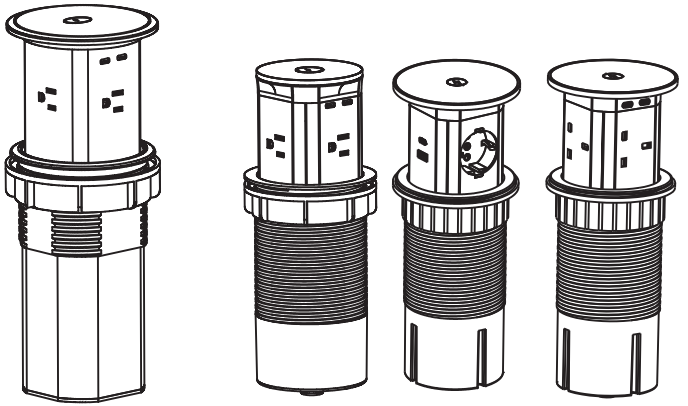

Type A
Aluminium
OD=100mm

Type B
Plastic
OD=85mm

Product Description

●Four-sided function parts, it is more convenient to use.

●**Configuration:**

US: Wireless Charger, 4 US Plugs, 2 USB C and 1 USB A fast charger,1.8M 16AWG power cord.

EU: Wireless Charger, 2 EU Plugs, 2 USB A and 2 USB C fast charger, 2M 1.0mm² power cord.

UK: Wireless Charger, 4 UK Plugs, 2 USB C and 1 USB A fast charger,1.8M 1.0mm² power cord.

●Voltage: USB C1/C2: PD 45W, USB A: PD 18W
USB A+C1/C2 or USB A+C1+C2+15W: 5V 3A(15W)
USB C1/C2+Wireless Charger: PD 30W +Wireless Charger 15W
USB A+Wireless Charger: USB A: QC 18W +Wireless Charger 15W
USB A+C1/C2+Wireless Charger or USB A+C1+C2+Wireless Charger: 5V 3A(15W)+Wireless Charger 15W

●Materials: The shell for Type A(OD=100mm) is aluminum alloy and the modules are made of flame retardant PC.
The shell for Type B(OD=85mm) is ABS and the modules are made of PC, it is flame retardant.
The top is made of tempered glass, it is waterproof.

● **【Attention】Reset-Off Switch at the bottom**

1. Before using, please turn on the switch at the bottom.
2. The bottom of the product is equipped with automatic reset overload protection switch, if the access electrical equipment exceeds the rated power 110-250V 15A, the product will automatically enter the protection, that is, the state of power supply and power failure repeatedly. Please replace the electrical appliances within the rated range, you can return to normal operation.

●This product is with hydraulic spring and lock, press to pop up and down. Pneumatic lifting components, makes the function parts rise slowly, it is safe and noise reduction.

Model	Type A	Type B
Install Size	OD=100mm	OD=85mm
Material	Aluminium and PC	ABS and PC
Color	Silver, Black	Black, White
Panel	Tempered glass top	
Power Rating	110-250V 15A 50/60Hz	
Warranty	1 Year Warranty	

How to Install



Drill hole



Place outlet



Adjust position



Screw on